



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/714,514	11/17/2000	Darko Pervan	003300-700	5020

21839 7590 01/13/2004

BURNS DOANE SWECKER & MATHIS L L P
POST OFFICE BOX 1404
ALEXANDRIA, VA 22313-1404

EXAMINER

A, PHI DIEU TRAN

ART UNIT	PAPER NUMBER
----------	--------------

3637

DATE MAILED: 01/13/2004

Please find below and/or attached an Office communication concerning this application or proceeding.

Office Action Summary

Application No.

09/714,514

Applicant(s)

PERVAN, DARKO

Examiner

Phi D A

Art Unit

3637

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133).
- Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 17 September 2003.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-30 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-30 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on _____ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. §§ 119 and 120

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. _____.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
* See the attached detailed Office action for a list of the certified copies not received.
- 13) ☐ Acknowledgment is made of a claim for domestic priority under 35 U.S.C. § 119(e) (to a provisional application) since a specific reference was included in the first sentence of the specification or in an Application Data Sheet. 37 CFR 1.78.
a) ☐ The translation of the foreign language provisional application has been received.
- 14) ☐ Acknowledgment is made of a claim for domestic priority under 35 U.S.C. §§ 120 and/or 121 since a specific reference was included in the first sentence of the specification or in an Application Data Sheet. 37 CFR 1.78.

Attachment(s)

- 1) ☐ Notice of References Cited (PTO-892)
- 2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
- 3) ☒ Information Disclosure Statement(s) (PTO-1449) Paper No(s) 22,23,28.
- 4) ☐ Interview Summary (PTO-413) Paper No(s). _____
- 5) ☐ Notice of Informal Patent Application (PTO-152)
- 6) ☐ Other: _____

Claim Objections

1. Claim 26 is objected to because of the following informalities: line 2 ‘ the a “ is improper. Appropriate correction is required.

Claim Rejections - 35 USC § 103

1. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

2. Claims 1-14, 16-30 are rejected under 35 U.S.C. 103(a) as being unpatentable over Moriau et al (6006486) in view of Roy et al (6216409).

Moriau et al (figure 23-25) shows a locking system for mechanical joining of floorboards, the locking system comprising a tongue and groove joint, the groove and tongue of which have cooperating upper abutment surfaces and cooperating lower abutment surfaces for vertical locking of the two joint edges of two adjacent floorboards, the upper abutment surfaces extending in a first plane parallel to a principal plane of the floorboards and the lower abutment surfaces(6, 83) extending in a second plane essentially parallel to the principal plane of the floorboards, the locking system comprising, for horizontal mechanical joining of the joint edges perpendicular to the joint edges, a locking groove(81) formed in an underside of a first one of the floorboards and extended in parallel therewith and spaced from the joint edge, a portion projecting from a second one of the floorboards, the portion supporting at a distance from the joint edge, a locking element (9) cooperating with the locking groove, the tongue is anglable into

Art Unit: 3637

the groove, the locking element is insertable into the locking groove by mutual angular motion of the floorboards about upper portions of the joint edges, in a joined state, the cooperating upper abutment surfaces are in contact with each other and are limited horizontally inwards from the joint edge and horizontally outwards to the joint edge by an inner vertical plane and an outer vertical plane respectively, at least a portion of the lower abutment surfaces (34) are positioned outside the outer vertical plane, the lower abutment surfaces are located at least partially outside a vertical joint plane (84) which is defined by adjoining upper portions of the joined joint edges of the two floorboards, the major part of the lower abutment surfaces is positioned outside the vertical joint plane, the projecting portion and the groove are arranged in one and the same joint edge of the floor board, the projecting portion is at least partially made in one piece with a body of the floorboard, the locking element (6) of the projection portion is positioned on a level with and toward an underside of the floorboard from the lower abutment surface of the groove, the projecting portion is at least partially formed of a material other than that of a body of the floorboard (the cover 7), the projecting portion is at least partially formed of a separate strip (the cover 7) which is integrally connected with the board by being mounted in the factory, the projecting portion is resilient transversely of the principal plane of the floorboards, the tongue is insertable into the groove and the locking element is insertable into the locking groove by a mutual horizontal joining of the joint edges of the boards, the projecting portion, in a horizontal direction between the lower abutment surfaces of the tongue and groove joint on the one hand and the locking element of the projecting portion on the other hand, has a lower portion which is positioned toward an underside of said floorboard from said lower abutment surfaces, the tongue is anglable into the groove and the locking element is insertable into the locking groove by the

mutual angular motion of the boards about upper portions of the joint edges while the upper portion are held in mutual contact, the board being provided along one or more sides with the locking system (figure 1), the floorboard having opposite long sides and short sides and which is mechanically joinable along each long side with a long side of an identical floorboard by downward angling and which is mechanically joinable along each short side with a short side of an identical floorboard by displacement along the long sides, the locking system is on each of our edges of a floorboard (inherently so for the boards to be able to join), the projecting portion is resilient, the strip is resilient, all the lower abutment surfaces are positioned outside the outer vertical plane, the upper abutment surface of the locking element is below the second plane, the cooperating upper abutment surfaces are at least partially displaced from the cooperating lower abutment surfaces in a displacing direction parallel to the principle plane of the boards, at least a portion of the lower cooperating abutment surface (the part of 78 which mates with the curving bottom of part 9) is horizontally inward from the vertical joint plane defined by a contacting portion of two juxtapose upper portions of the floorboards, a first juxtaposed upper portion on a first one of the floorboards and a second juxtaposed upper portion on a second one of the floorboards, at least a portion of the lower cooperating abutment surface is between the outer vertical plane and a vertical joint plane defined by a contacting portion of two juxtaposed upper portions of the floorboards, a first juxtaposed upper portion on a first one of the floorboards and a second juxtaposed upper portion on a second one of the floorboards.

Moriau et al does not show the tongue and groove joint is so designed that there is in the groove between the inner vertical plane and the outer vertical plane and below the tongue, a space which extends horizontally from the inner vertical plane and at least halfway to the outer

Art Unit: 3637

vertical plane, an angling state, the tongue and groove is further so designed that the floorboards during a final phase of an inwards angling when the locking element is inserted into the locking groove can take a position where there is space in the groove between the inner and outer vertical plane and below the tongue.

Roy et al shows the tongue and groove joint (4, 50 is so designed that there is in the groove between the inner vertical plane and the outer vertical plane (look at D3) and below the tongue, a space (formed by the bottom of part 12 and the groove 5) which extends horizontally from the inner vertical plane and at least halfway to the outer vertical plane, and at an angling state, the tongue and groove is further so designed that the floorboards during a final phase of an inwards angling when the locking element is inserted into the locking groove can take a position where there is space in the groove between the inner and outer vertical plane and below the tongue.

It would have been obvious to one having ordinary skill in the art at the time of the invention to modify Moriau et al to show the tongue and groove joint is so designed that there is in the groove between the inner vertical plane and the outer vertical plane and below the tongue, a space which extends horizontally from the inner vertical plane and at least halfway to the outer vertical plane, an angling state, the tongue and groove is further so designed that the floorboards during a final phase of an inwards angling when the locking element is inserted into the locking groove can take a position where there is space in the groove between the inner and outer vertical plane and below the tongue because it would enable the easy angling insertion of the parts together as taught by Roy et al.

Per claims 2-5, Moriau et al as modified by Roy et al shows the space in the joined state is horizontally extended below the tongue all the way from the inner vertical plane to the outer vertical plane so that no part of the lower abutment surfaces is positioned inside the outer vertical plane, the space during the final phase of the inwards angling is horizontally extended below the tongue all the way from the inner vertical plane to the outer vertical plane, the groove in the joined state having an upper and a lower horizontal surface which constitute inwardly directed extensions of the upper abutment surface and the lower abutment surface respectively of the groove, wherein there is in the joined state a horizontal play between a bottom of the groove and a tip of the tongue, the outer vertical plane is located at a horizontally distance inside a vertical joint plane which is defined by adjoining upper portions of the joint edges of the two floorboards.

3. Claim 15 is rejected under 35 U.S.C. 103(a) as being unpatentable over Moriau et al (6006486) in view of Roy et al (6216409).

Moriau et al as modified by Roy et al shows all the claimed limitations except for the groove having in upper part a beveled portion for guiding the tongue into the groove.

Roy et al (figure 2) further shows a beveled portion (the portion on the right of numeral 31) for guiding the tongue into the groove.

It would have been obvious to one having ordinary skill in the art at the time of the invention to modify Moriau et al to show the groove having in upper part a beveled portion for guiding the tongue into the groove because it would enable easy angling insertion of the tongue into the groove as taught by Roy et al.

Art Unit: 3637

Response to Arguments


Applicant's arguments, see amendment E, filed 9/17/03, with respect to the rejection(s) of claim(s) 1-24 under Terbrack et al have been fully considered and are persuasive. Therefore, the rejection has been withdrawn. However, upon further consideration, a new ground(s) of rejection is made in view of Moriau et al (6006486) and Roy et al (6216409).

Conclusion

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Phi D A whose telephone number is 703-306-9136. The examiner can normally be reached on Monday-Thursday.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Lanna Mai can be reached on 703-308-2486. The fax phone numbers for the organization where this application or proceeding is assigned are 703-872-9306 for regular communications and 703-872-9306 for After Final communications.

Any inquiry of a general nature or relating to the status of this application or proceeding should be directed to the receptionist whose telephone number is 703-308-1113.

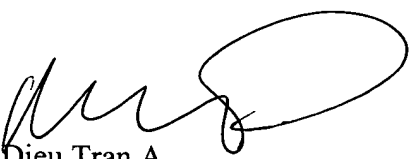

Phi Dieu Tran A
January 12, 2004